

Brio®

Brio® where ideas unfold

Brio® Residential
Pack Set Range

Brio® where ideas unfold

Watch your adventurous architectural ideas unfold into exciting reality with the Brio range of sliding and folding door hardware.


Brio is passionate about shaping the spaces in which people live, work and play. With subsidiaries in the UK and USA – Brio is recognised by architects worldwide as a leading design and manufacturing company.

Brio's R&D department brings a strong design element to the business, developing and testing ground breaking concepts that continue to be at the forefront of the industry.

So it's no surprise our name Brio translates to Energy, Spirit and Vitality – the core values that drive us to always discover new solutions for our customers.

We are committed to the continuous improvement of quality. That is why Brio, located in Sydney, is certified to Quality Management System AS/NZS ISO 9001:2008.

Brio, part of the Allegion family of brands

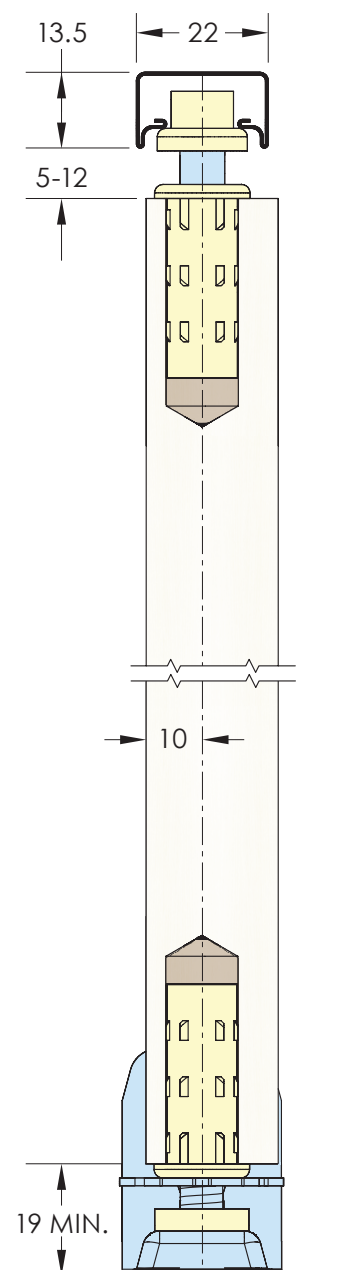


Bifold 16

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
16kg	620mm	2400mm	23mm	± 3.5mm	± 4mm

Application

Bifold 16 is a simple to install, folding door hardware system for panels weighing less than 16kg. Neither top hung or bottom rolling; Bifold 16 supports the panels at the pivot base and incorporates spring loaded guides at the head. Bifold 16 is designed to be used without a bottom channel which makes it ideal for cupboards, pantries, laundry rooms and room dividers. The top channel is only 13.5mm high which maximises the opening and is easy to conceal.

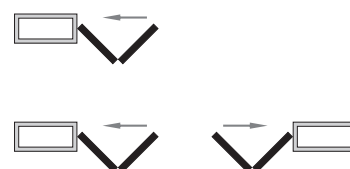

Sets Available

BF16-09/2

Opening width: up to 915mm, 2 panels

BF16-12/2


Opening width: up to 1250mm, 2 panels

BF16-18/4

Opening width: up to 1830mm, 4 panels

BF16-25/4

Opening width: up to 2500mm, 4 panels

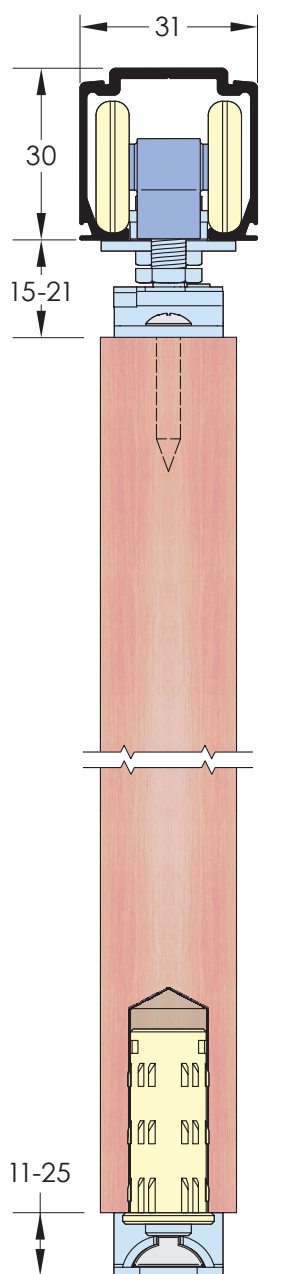

Multifold 30

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
30kg	650mm	2400mm	19mm	± 3mm	± 4mm

Application

Multifold 30 from Brio is a versatile, interior folding door hardware system. The axis on the pivot and hangers sits within 25mm of the edge of the door, minimising the overhang of the panels, improving appearance and making it possible to fit trim to hide the gap between track and panel. The hanger includes four precision bearings and a quick release plate. This with the single spanner height adjustment makes installation easy.

Sets Available

MF30-13/2


Opening width: up to 1300mm for 2 panels

MF30-2PK

2 panel pack

MF30-4PK

4 panel pack





Sprintline 30

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
30kg	1500mm	2400mm	25mm	± 8mm	-

Application

Sprintline 30, the ever popular slide is now even better. The track is made from extruded aluminium for a smooth, quiet motion. The height can accurately be adjusted whilst the hanger takes the full weight of the panel. The pelmet is also made from extruded aluminium and is available in powder coat white.

Sets Available

SL30-16/1

Track length: 1600mm, single panel

SL30-24/1

Track length: 2400mm, single panel

SL30-1PK

Pack of fittings only


170-18

1.8m pelmet, painted white
supplied with end caps

170-30

3m pelmet, painted white
supplied with end caps



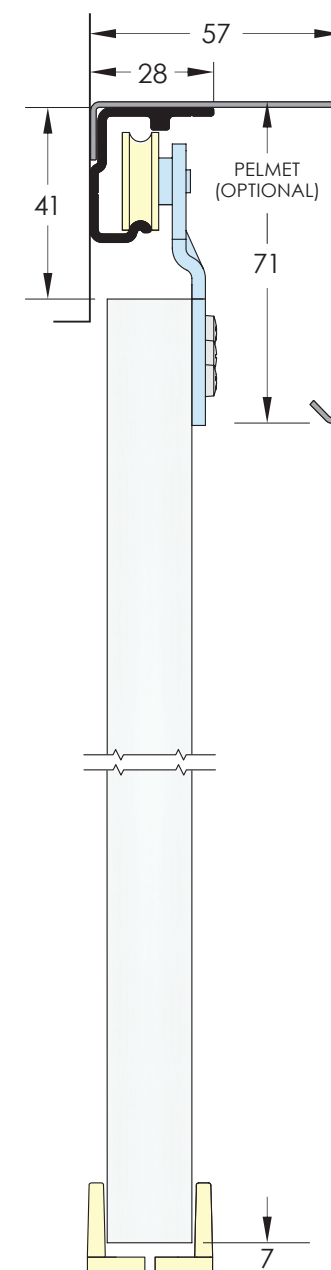

Wardrobe Single 50

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
50kg	900mm	2400mm	16mm	± 5mm	—

Application

Wardrobe Single 50 is a durable heavy duty slide with an adjustable face fix hanger suitable for thin medium density fibre (MDF) board. The high speed, precision sealed bearings ensure extended life and smooth operation as the hangers run on an aluminium rail. The track can be soffit or face fixed and dressed with an optional powder coat white, aluminium pelmet.

Sets Available

WS50-12/1

Track length: 1200mm, single panel

WS50-15/1

Track length: 1500mm, single panel

170-18

1.8m pelmet, painted white
supplied with end caps

WS50-18/1

Track length: 1800mm, single panel


WS50-1PK

Pack of fittings only

170-30

3m pelmet, painted white
supplied with end caps




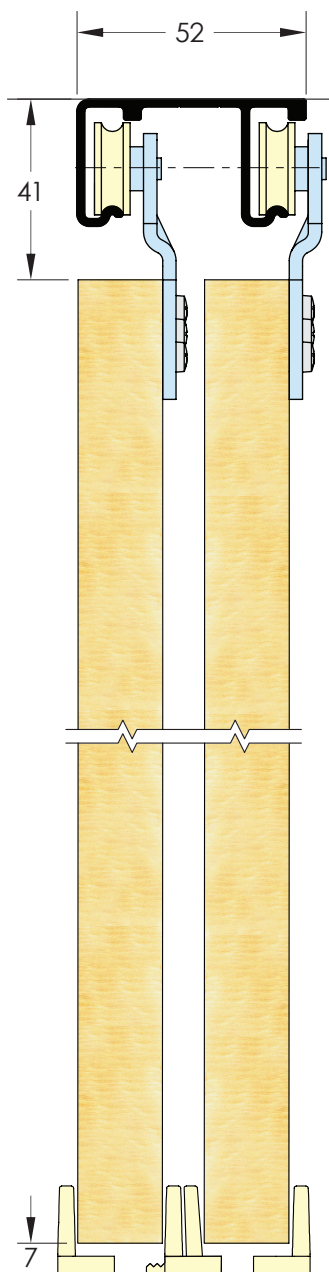

Wardrobe Double 50

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
50kg	900mm	2400mm	16mm	± 5mm	—

Application



Wardrobe Double 50, as the name implies, is designed specifically for wardrobes. It is a top hung system that can accommodate panels weighing 50kg each. The face fix hangers are adjustable and fitted on the blind side of the opening. Wardrobe Double 50 can be extended to three panels on three lines by adding Wardrobe Single 50 to run in parallel.

The expectation of wardrobes is they operate in silence. Brio is one of a few manufacturers that use precision bearings as standard to reduce noise and ensures the system remains that way.

Sets Available

WD50-12/2

Opening width: 1200mm,
2 panels

WD50-15/2

Opening width: 1500mm,
2 panels

WD50-18/2


Opening width: 1800mm,
2 panels

WD50-24/3

Opening width: 2400mm,
3 panels

WD50-2PK

2 panels
pack of fittings only

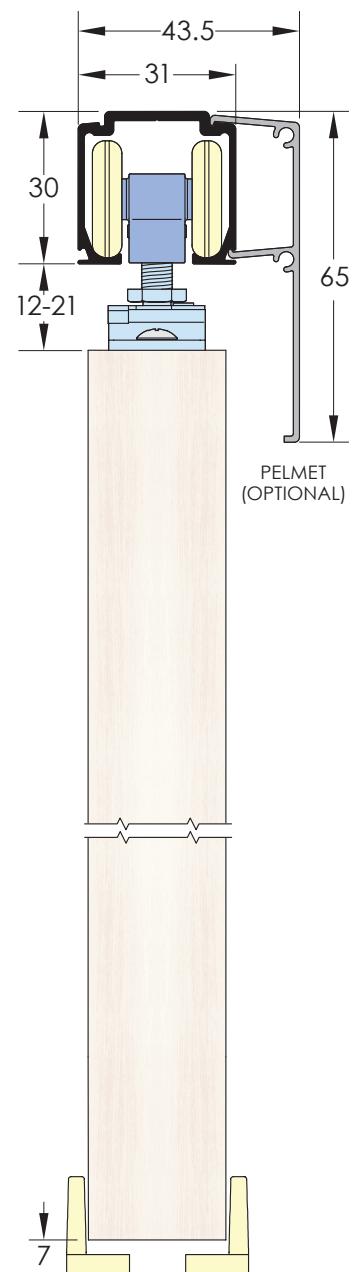

Single Run 60

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
60kg	1525mm	2400mm	19mm	± 4.5mm	—

Application

Single Run 60 is the most versatile of all slides, with a full 'C' section aluminium track and 4 wheels per hanger, it offers long life, stability and a high capacity of 60kg. Two, quick release plate options allow for either standard straight sliding applications with side feed access or a cavity door application with end feed access. Both offer easy height adjustment with a single spanner (supplied). The Single Run sets are supplied with clip stops or 2 soft close devices. The Cavity Run kits do not include clip stops or soft close.

Kits Available

SR60-20/1

Track length: 2000mm, single panel

SR60-30/1

Track length: 3000mm, single panel

60SCT


Soft close unit for one door


63-20 or 63-30

Pelmet, 2m or 3m painted white or anodised, supplied with end caps

SR60-1PK

Pack of fittings only

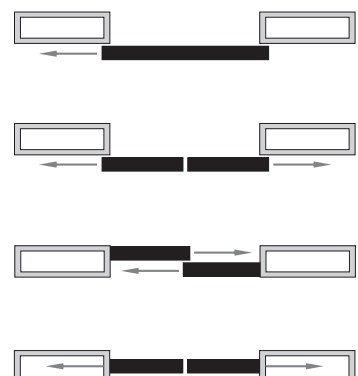


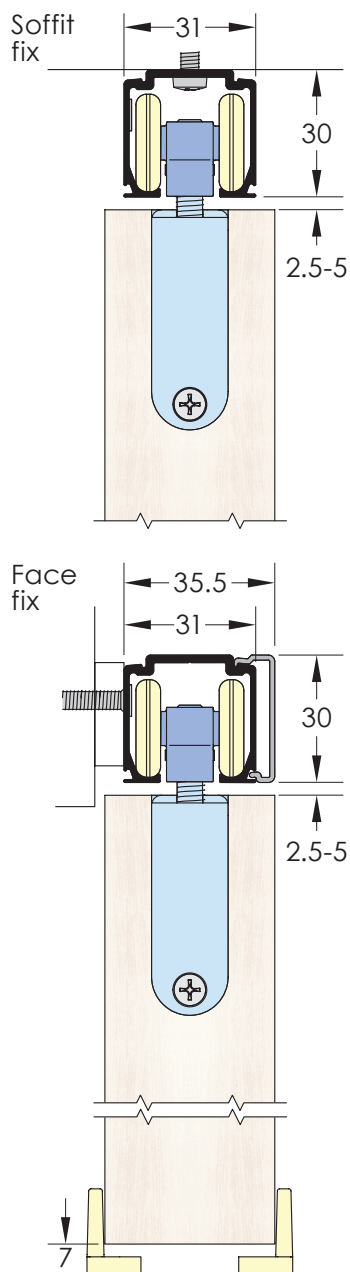

Zero Clearance 60

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
60kg	1525mm	2400mm	28mm	± 4mm	—

Application

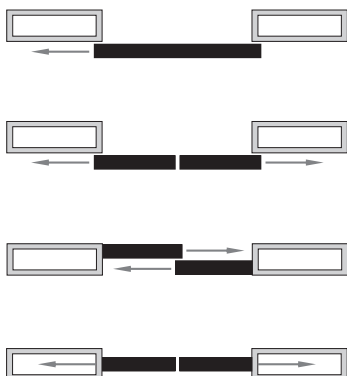

Zero Clearance 60 discreetly conceals the hanger plate inside the top of the door which provides a sleek look for any application. Zero Clearance sets are for standard straight sliding panels, and all sets are available with clip stops or soft close devices. Zero Clearance sets also offer a face fix option where the track is punched and supplied with aluminium pelmet.

Sets Available


ZC60-20/1
Track length: 2000mm,
single panel

ZC60-30/1
Track length: 3000mm,
single panel

60SCT
Soft close unit for one door

ZC60-1PK
Pack of fittings only

ZC60F-S20
Track length: 2000mm, single
panel face fixed track with
pelmet and soft close unit

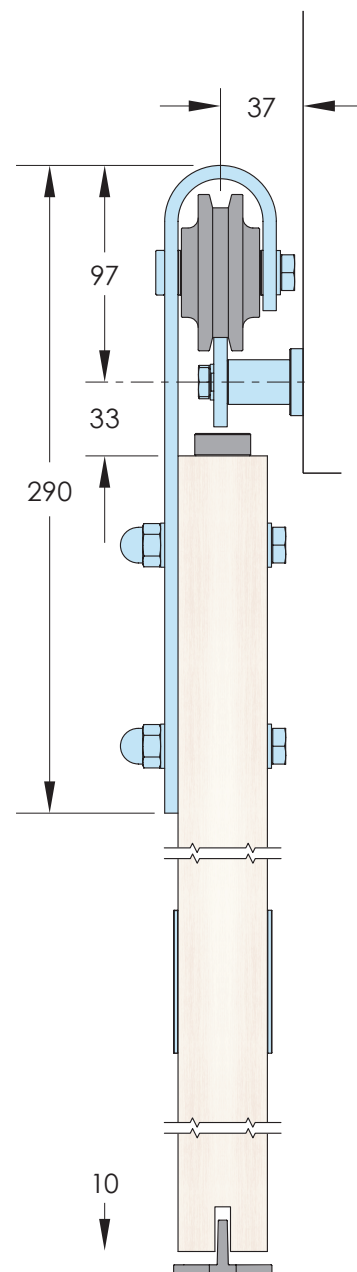

Open Bar Rail Timber 80

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
80kg	1250mm	3000mm	35mm	—	—

Application

Brio's new flat bar system offers a barn door solution for panels up to 80kg in weight and 1.25m in width. This easy to install system uses a precision bearing and nylon tyre which rolls smoothly over a flat bar rail. The face fix straps and rail are available in stainless steel with a brushed satin finish or mild steel with a textured, matt black powder coat. Standard sets include length of rail, hangers, door stops and guide for single panel applications.



Sets Available

OBF80-20

Rail length: 2000mm, SS finish

OBF80-20PB


Rail length: 2000mm, black finish

OBF80-25

Rail length: 2500mm, SS finish

OBF80-25PB


Rail length: 2500mm, black finish

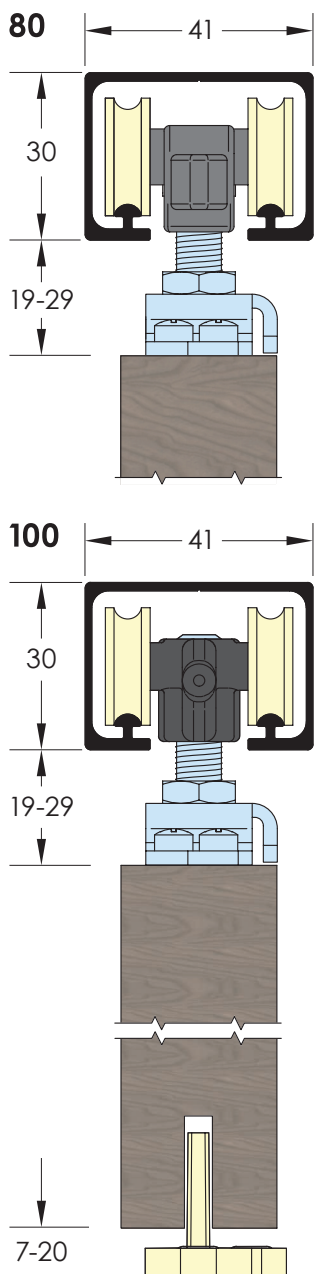

Single Run 80 and 100

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
80/100kg	2000mm	3000mm	28mm	± 5mm	—

Application

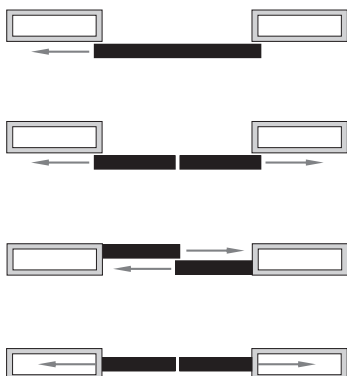

Single Run 80 and Single Run 100 are available as sets or loose parts. These systems bridge residential to light commercial applications for panels of 80kg or 100kg which are likely to be custom made for their application. Single Run 80 uses a structural polymer hanger while Single Run 100 has a cast alloy body. Both systems run inside an aluminium track which is square cut for a contemporary, clean look. Sets are supplied with clip stops as standard but these can be upgraded to soft close devices which operate by catching the moving panel and absorbing its speed before gently pulling it in to the jamb ensuring a quiet stop and protecting small hands from slamming doors.

Sets Available

SR80-20/1
Track length: 2000mm,
single panel

SR80-30/1
Track length: 3000mm,
single panel


SR100-20/1
Track length: 2000mm,
single panel

SR100-30/1
Track length: 3000mm,
single panel

SR80-1PK
80kg pack of fittings only

SR100-1PK
100kg pack of fittings only

100SCT
Soft close unit for one door

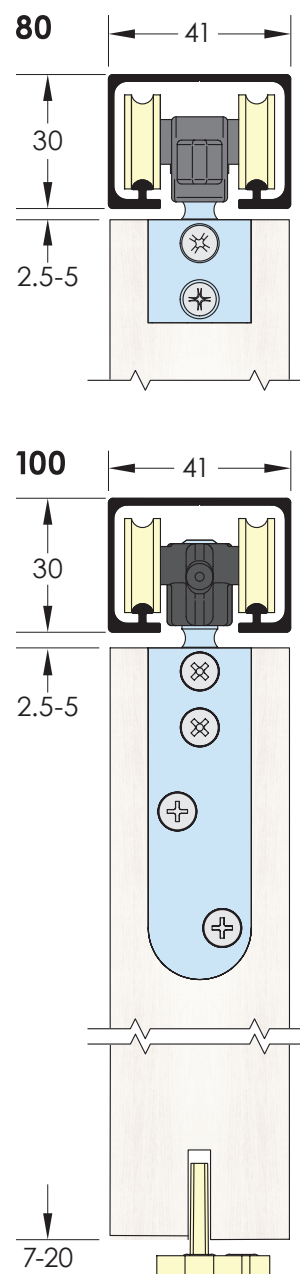

Zero Clearance 80 and 100

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
80/100kg	2000mm	3000mm	32mm	± 2.0mm	—

Application

Zero Clearance 80 and 100 are the definitive straight sliding systems as panels appear to float just below the track meaning there are no large gaps or hardware to hide. Zero Clearance uses an ingenious sliding rail mechanism rebated into the top of the panel to achieve these ultra low clearances. To adjust the height, simply loosen the end cap and slide the inner sleeve out to gain access to the hanger bolt. When assembled, no further adjustment is possible meaning the panel's height can not slip over time. Brio's soft close accessory is also available, clip stops supplied in sets.

Sets Available

ZC80-20/1

Track length: 2000mm, single panel

ZC80-30/1

Track length: 3000mm, single panel

ZC100-20/1

Track length: 2000mm, single panel

ZC100-30/1

Track length: 3000mm, single panel

ZC80-1PK


80kg pack of fittings only


ZC100-1PK

100kg pack of fittings only

100SCT

Soft close unit for one door

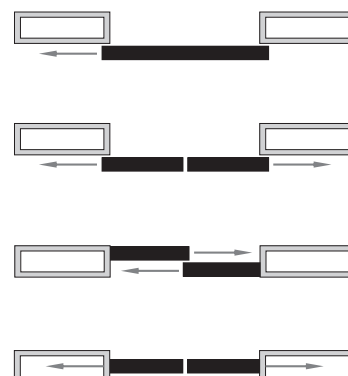

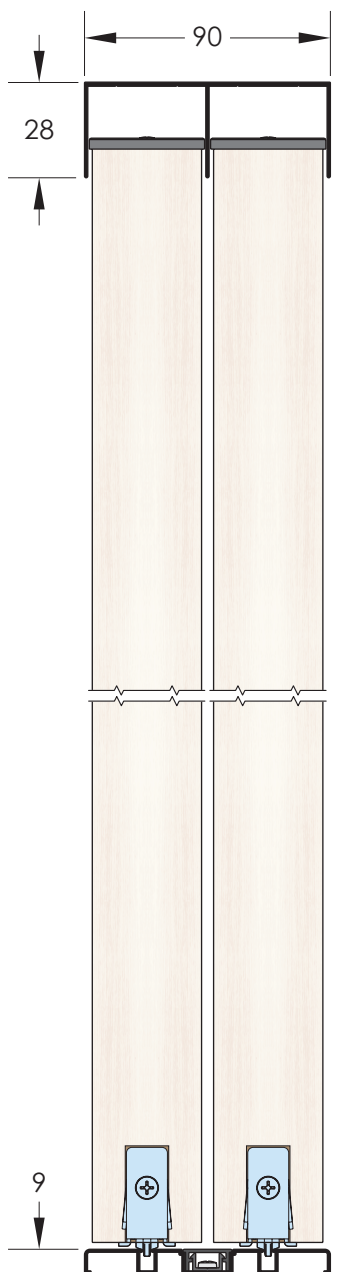

Wardrobe Roll 50

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
50kg	820mm	2400mm	30mm	± 2.5mm	—

Application



Brio's Wardrobe Roll 50 allows bottom rolling panels to bypass each other effortlessly while the clean lines of the frame make it perfect for neat, built-in wardrobes. The precision bearing with nylon tyre provides whisper quiet operation and long lasting life cycle. Sets are available for 2 and 3 panels in either powder coat white or clear anodised. Brio's specifically developed 50kg Soft Close is an optional accessory.

Sets Available

WR50-12/2PWT or WR50-12/2CA

Opening width: 1200mm,
2 panels, white/clear anodised

WR50-18/3PWT or WR50-18/2CA

Opening width: 1800mm,
2 panels, white/clear anodised

WR50-1PK

1 panel, pack of fittings only

WR50-15/2PWT or WR50-15/2CA


Opening width: 1500mm,
2 panels, white/clear anodised

WR50-24/3PWT or WR50-24/3CA

Opening width: 2400mm,
3 panels, white/clear anodised

50SCT

Soft Close unit for one door

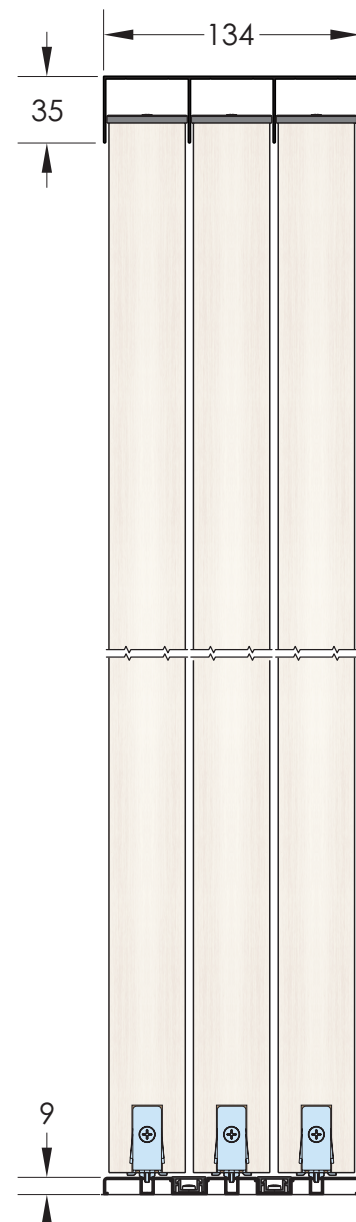

Wardrobe Roll Trio 50

Max Panel Weight	Max Panel Width	Max Panel Height	Min Panel Thickness	Height Adjustment	Horizontal Adjustment
50kg	820mm	2400mm	30mm	± 2.5mm	—

Application

Brio's Wardrobe Roll Trio 50 allows bottom rolling panels to bypass each other effortlessly while the clean lines of the frame make it perfect for neat, built-in wardrobes. The precision bearing with nylon tyre provides whisper quiet operation and long lasting life cycle. Sets are available for 3 panels in either powder coat white or clear anodised. Brio's specifically developed 50kg Soft Close is an optional accessory.



Sets Available

WT50-18/3PWT or WT50-18/3CA

Opening width: 1800mm,
3 panels, white/clear anodised

WT50-24/3PWT or WT50-24/3CA

Opening width: 2400mm,
3 panels, white/clear anodised

WR50-1PK

1 panel, pack of fittings only

WT50-21/3PWT or WT50-21/3CA

Opening width: 2100mm,
2 panels, white/clear anodised


WT50-27/3PWT or WT50-27/3CA

Opening width: 2700mm,
3 panels, white/clear anodised

50SCT

Soft Close unit for one door


Accessories

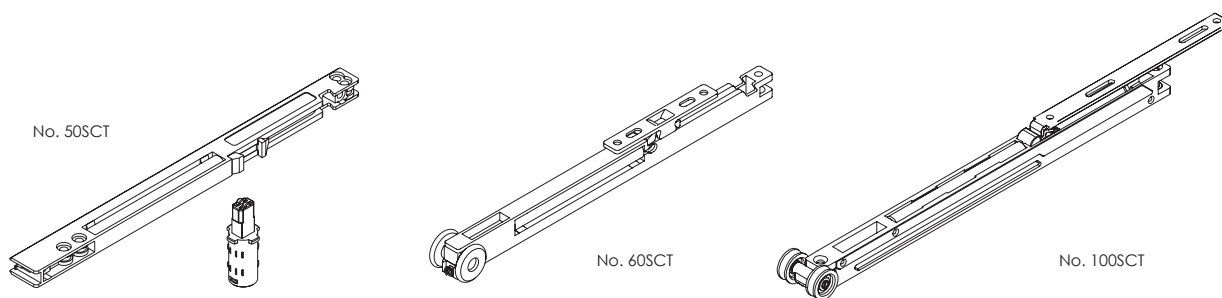


Soft Close
Wardrobe Roll 50

Soft Close
Single Run 60
Zero Clearance 60


Soft Close
Single Run 80/100
Zero Clearance 80/100



No. 64



No. 63

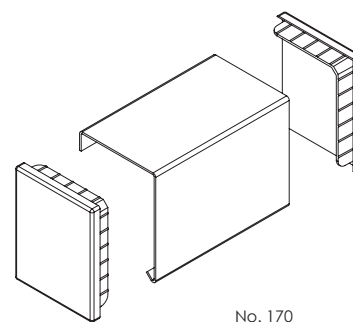


No. 170

Pelmet and End Caps
Zero Clearance 60
Length: 2m or 3m

Pelmet and End Caps
Single Run 60
Length: 2m or 3m

Pelmet and End Caps
Sprintline 30
Wardrobe Single 50
Length: 2m or 3m




No. 801



No. 92

**Alternative spring loaded
guide & channel**




No. 106SSMF




No. 96W

Alternative guide & channel




No. 106E/94



No. 94PPA

**Alternative guide
& channel with poly.**




No. 113N/81




No. 81

**Alternative guide &
channel**




No. 102WA

Alternative saw cut guide




No. 103WA

Alternative guide




No. 102W/94SS

Alternative guide




No. 101N

Alternative saw cut guide



No. 805

Alternative floor bracket
Multifold 30



No. C155LS

Cavity guide

Set Specifier

	Application			Operation			System Dimensions		Accessories		Fixing	
	Wardrobe Cupboard	Room Divider	Pocket Door	Biparting	Bypassing	No. of Panels	Max. Panel Weight	Max. Opening Size	Pelmet	Soft Close	Soffit	Face
Folding												
Bifold 16	•	•				2	16kg	2500mm			•	
Multifold 30	•	•				4	30kg	3900mm			•	
Top Hung Sliding												
Sprintline 30		•		•		1	30kg	2400mm	•			•
Wardrobe Single 50		•		•		1	50kg	1800mm	•		•	•
Wardrobe Double 50	•			•	•	3	50kg	2400mm			•	
Single Run 60		•	•	•	•	1	60kg	3000mm	•	•	•	•
Zero Clearance 60		•	•	•	•	1	60kg	3000mm	•	•	•	•
Open Bar Rail Timber 80		•		•	•	1	80kg	2500mm				•
Single Run 80 & 100		•		•	•	1	100kg	3000mm		•	•	
Zero Clearance 80 & 100		•		•	•	1	100kg	3000mm		•	•	
Bottom Rolling Sliding												
Wardrobe Roll 50	•				•	2/3	50kg	2400mm		•	•	
Wardrobe Roll Trio 50	•				•	3	50kg	2700mm		•	•	

Brio®

Brio New Zealand
437 Rosebank Road
Avondale 1026
Auckland
p. +64 9 829 0550
e. nzinfo@allegion.com
w. brionz.com

About Allegion

Allegion (NYSE: ALLE) is a global pioneer in the field of safety and security. We keep people and their property safe, wherever they are, bringing together simple solutions and advanced technology. Allegion is a \$2 billion company, with products sold in almost 130 countries. For more, visit www.brio.com.au



Brio ■ <FSH> ■ LCN ■ LEGGE ■ SCHLAGE

© 2017 Allegion
allegion.com