




Encore Commercial Smart Lock Installation Instructions

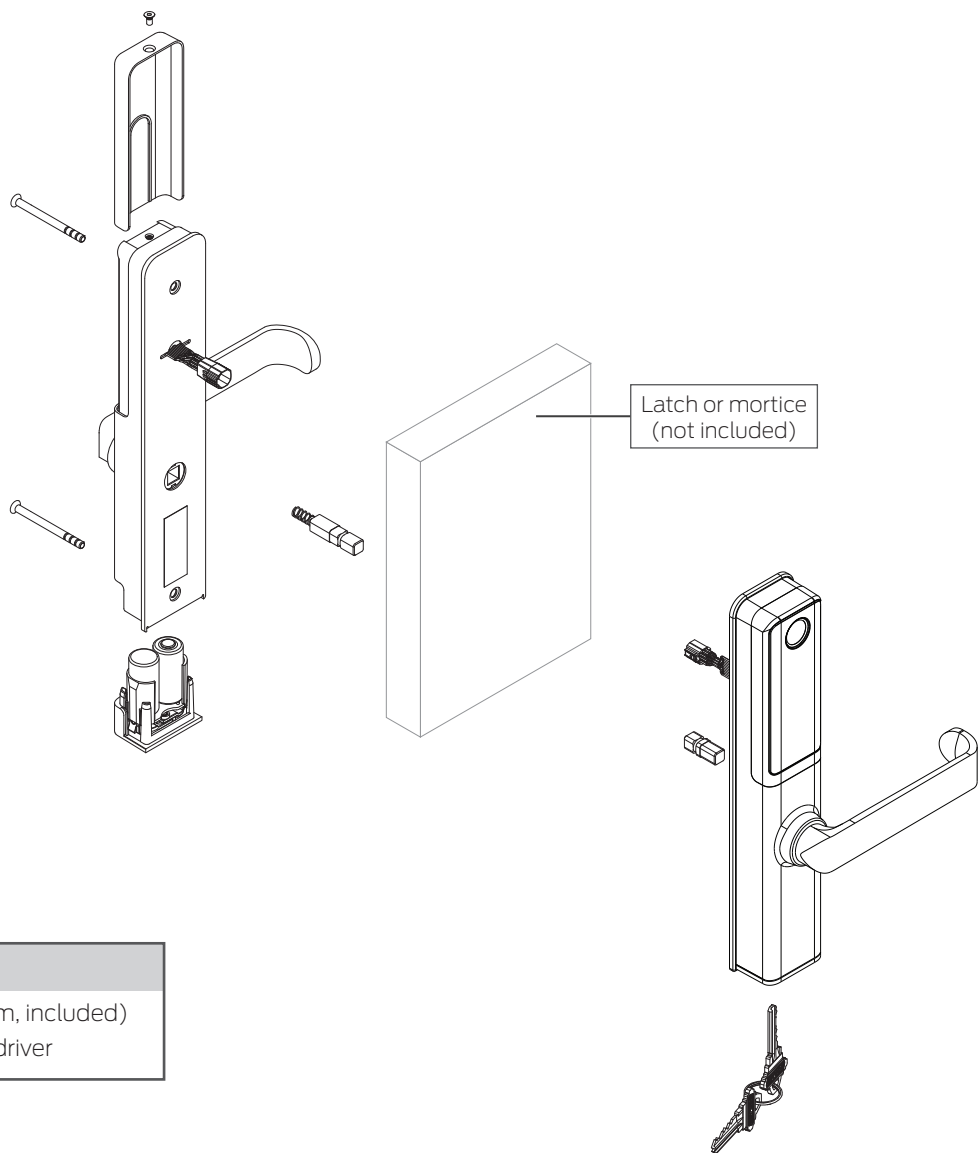

Tools

- Hex Tools (2.5 mm, included)
- #2 Phillips screwdriver

Important installation notes

WARNING

Warnings indicate potentially hazardous conditions, which if not avoided or corrected, may cause death or serious injury.

CAUTION

Cautions indicate potentially hazardous conditions, which if not avoided or corrected, may cause minor or moderate injury. Cautions may also warn against unsafe practices.

NOTICE




Notices indicate a condition that may cause equipment or property damage only.

Door preparation

- Prepare the door for the installation of the tubular latch or mortice lock as per the lock manufacturer's instructions.
- Prepare the door for the installation of the internal and external escutcheons using the template provided.


Prepare for installation

A Select spindles.


Door range (mm)	Latch/Mortice case hub size (mm)		Spindles	
	Inside	Outside	Inside	Outside
35 - 42.5	8	8		
42.5 - 50	8	8		
35 - 42.5	8	8		
42.5 - 50	8	8		
35 - 42.5	7.6	7.6		
42.5 - 50	7.6	7.6		
> 50	48001179 Thick door kit must be used. Contact customer service.			

B Hand levers

B1 Press the hex wrench into the center of the hub on the back of the assembly.

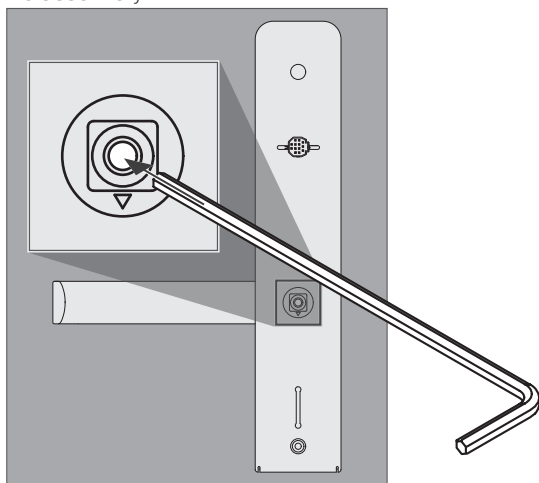


B2 While pressing the wrench in, rotate the lever to fit the door.

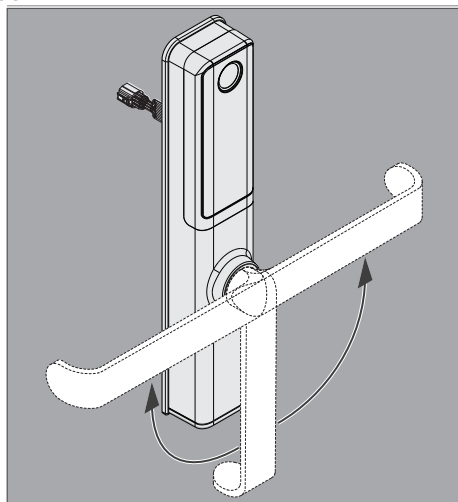


C Prepare outside assembly

C1 Ensure arrow on cam points down.

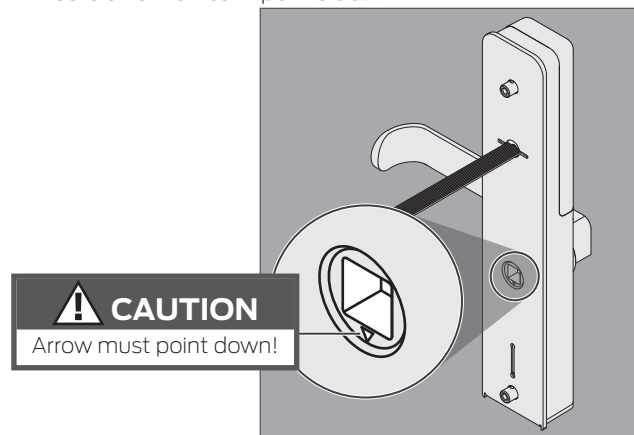


C2 Install spindle.
See step A for spindle selection.

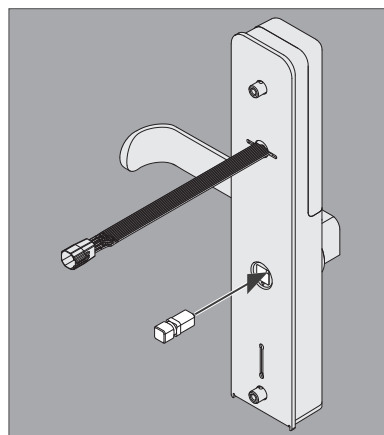


D Prepare inside assembly

D1 Remove cover.

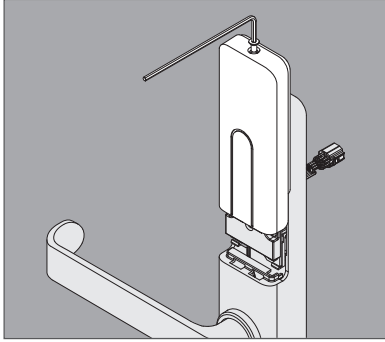


D2 Remove battery compartment.

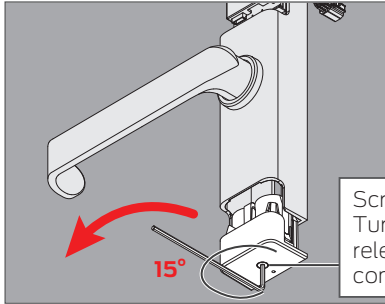

Screw is retained.
Turn gently to
release the battery
compartment.


D3 Install spindle.

See step A for spindle selection.

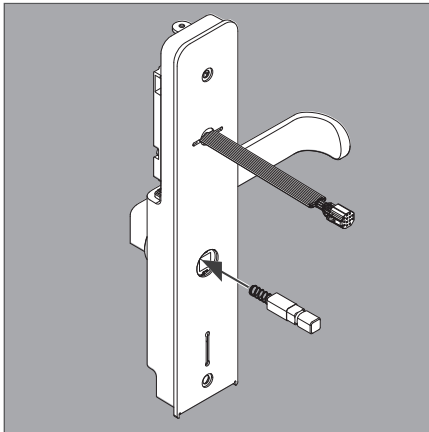

E Trim screws, if necessary

Door thickness (mm)

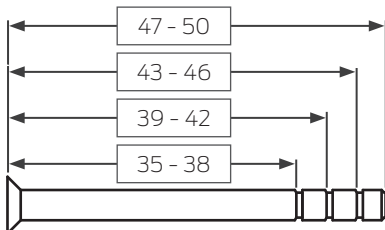

For doors thicker than 50mm, 48001179 thick door kit must be used. Contact customer service.

Installation

CAUTION

Install with door open to avoid lockout.


1 Install latch or mortice case

Install as directed by the manufacturer.

2 Install outside assembly

2a Route cable through hole in door. Place assembly against door and hold in place.

If lever is backward, see step B on page 2.

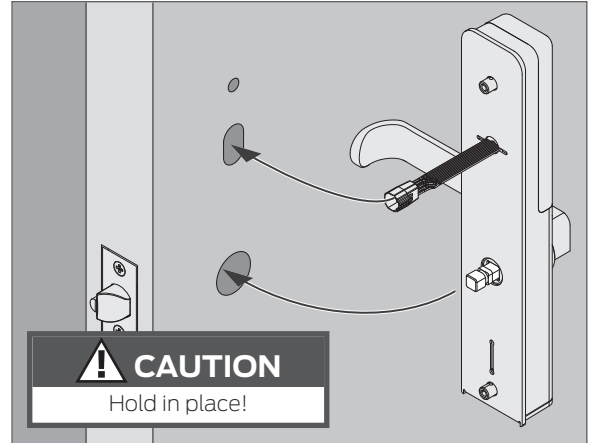


CAUTION

Hold in place!

3 Install inside assembly

3a Connect cable.

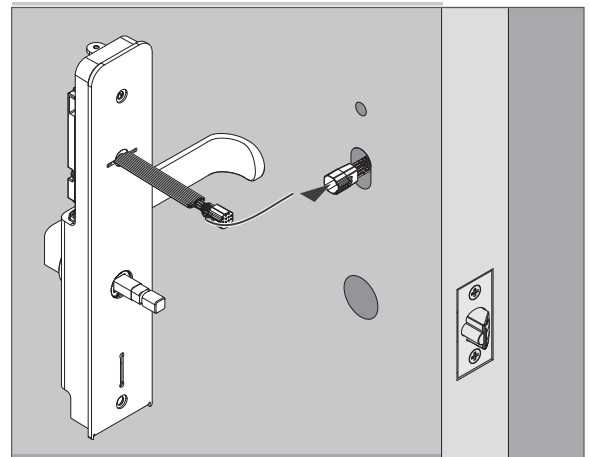

3b Tuck cable into door and place assembly against door. Install screws and tighten securely.


CAUTION

Do not crimp cable!


NOTICE

Make sure lock is straight before tightening.

3c Install two (2) CR123 batteries

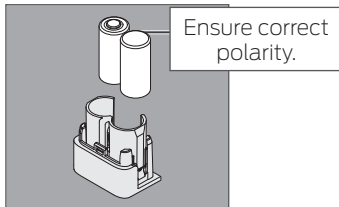


3d Replace the battery compartment.

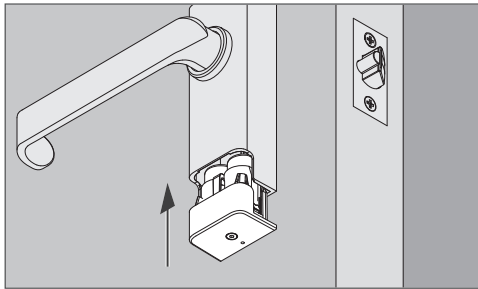

CAUTION

Press firmly until compartment clicks into place to prevent the batteries from falling out during operation.

3e Replace the cover.

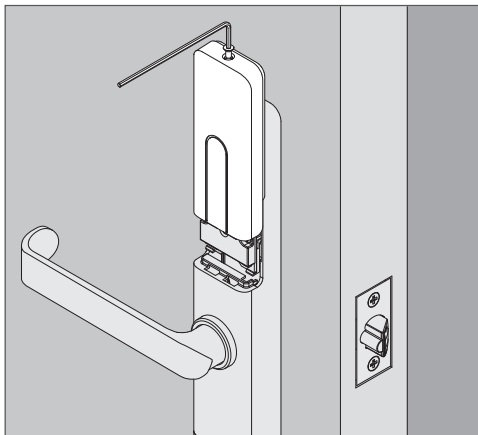

4 Programming the lock using the Breeze App

4a Download the Schlage Breeze App.



Scan
for iOS




Scan for
Android

4b Using the App, register an account and then login with your account.

4c In the App, select menu (≡) and then "+ Add Lock".



4d Follow the on-screen prompts to add the lock and manage users, etc.

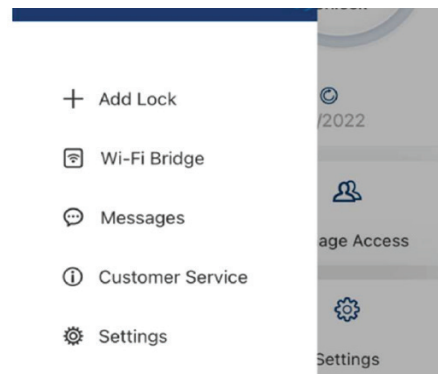


5 Resetting the lock

5a Using the App connect to the lock and ensure that the 'Reset Button' under 'Settings' is set as enabled.

5b Remove the inside assembly cover as per D1

5c Press and hold the reset button. The lock will beep once and the two LEDs will light up red.

5d When the lock makes two beeps, release the button. The two LEDs will light up green for three seconds to confirm the lock has been reset.

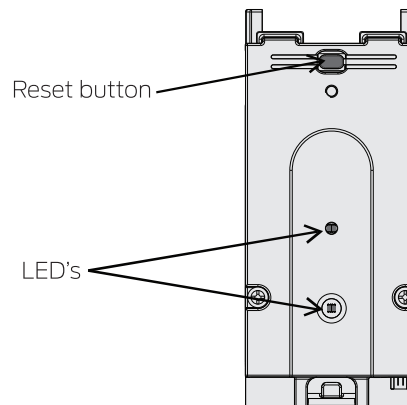

PDSC0101

Customer Service

Allegion (New Zealand) Ltd	Allegion (Australia) Pty Ltd
0800 477 869	1800 098 094
www.allegion.co.nz	www.allegion.com.au



©Allegion 2026