


Soft Close for Straight Sliding 80kg

Brio Australia
P: +61 2 87186718
W: brio.com.au
E: brio.sales@allegion.com

Brio UK
P: +44 191 2291224
W: briouk.com
E: brio.sales.uk@allegion.com

Brio USA
P: +1 585 3195599
W: briousa.com
E: brio.sales.usa@allegion.com


Components

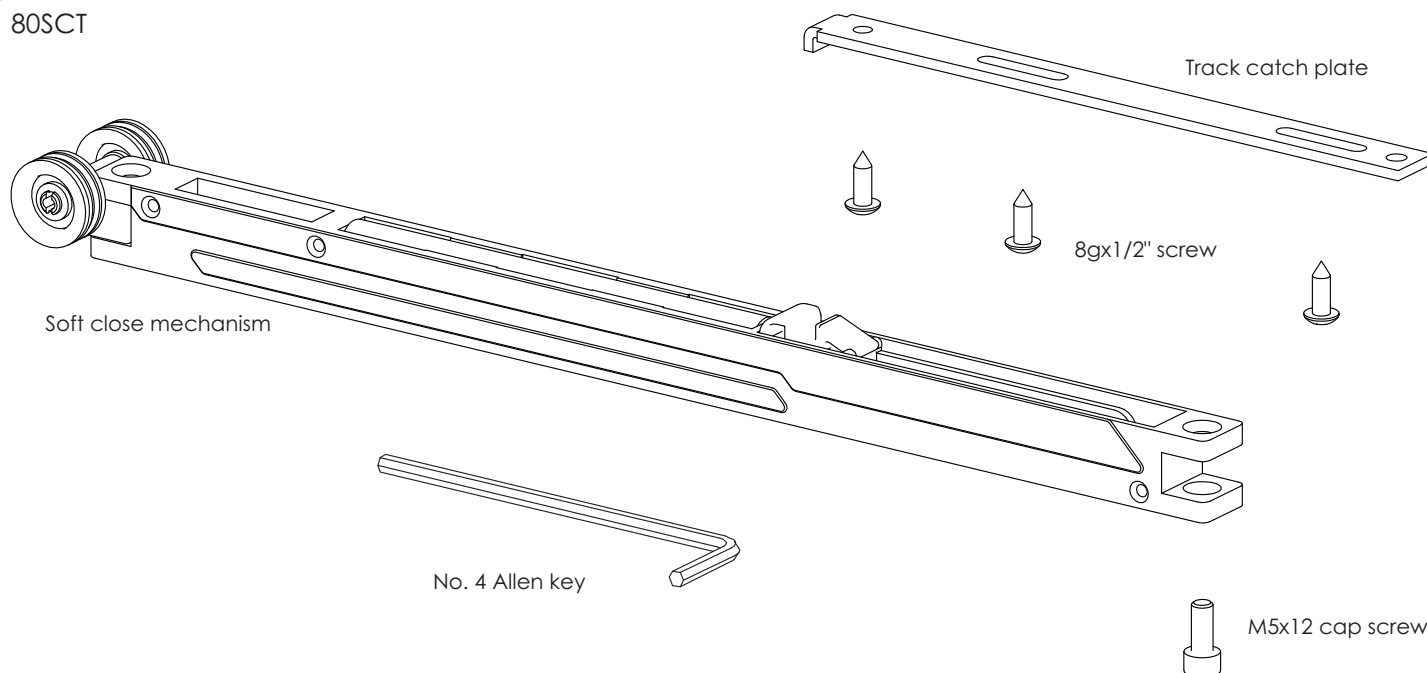


Applications HC = hanger centre distance from panel end

Single Run 80

Single Soft Close

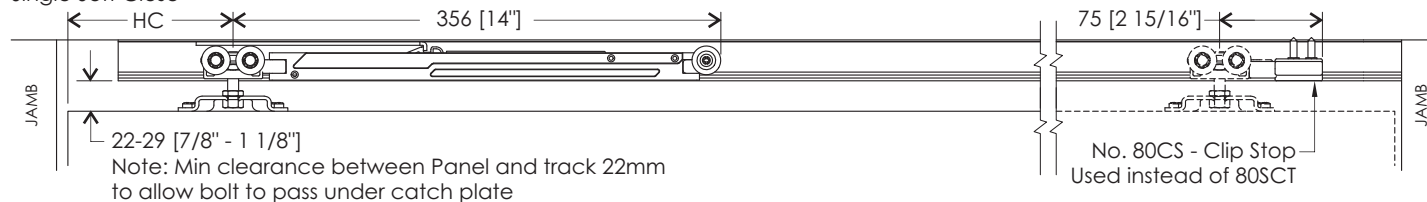


Double Soft Close

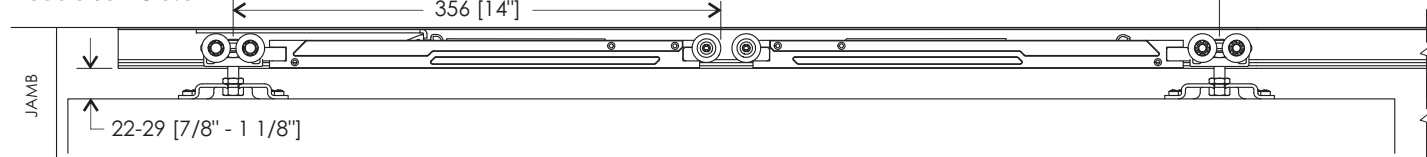


Zero Clearance 80 & Zero Clearance Glass 80

Single Soft Close

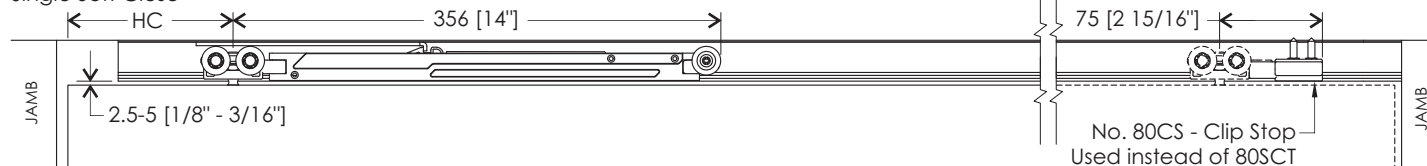


Double Soft Close

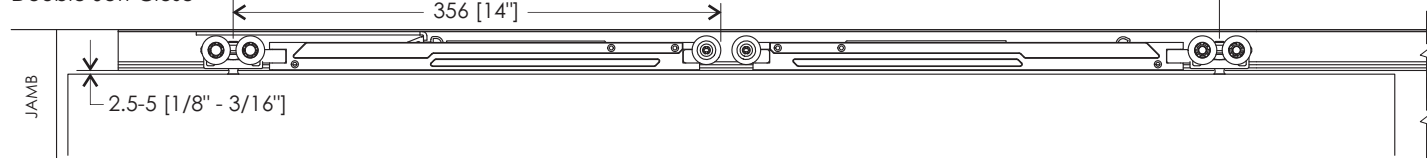


Installation

Single soft close application with Zero Clearance shown


Fix catch plate into track through slotted holes with 2 screws only

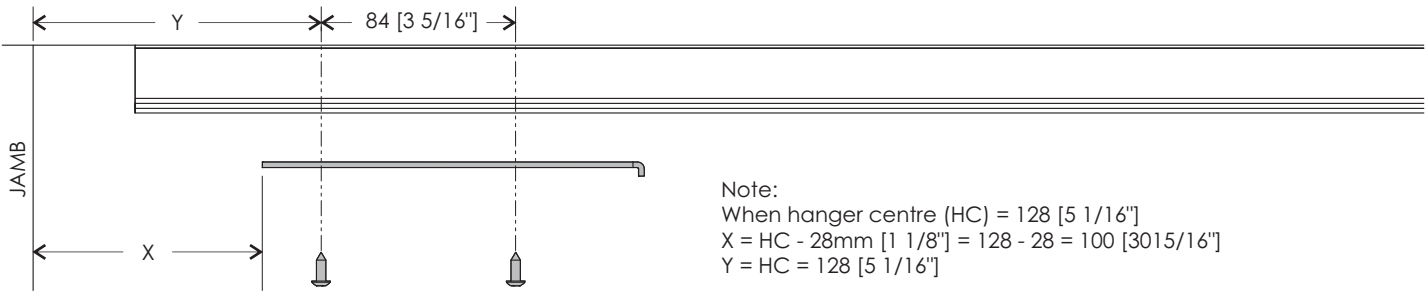


Insert clip stop & 1st hanger into track, then soft close. The soft close must be in primed position, as shown

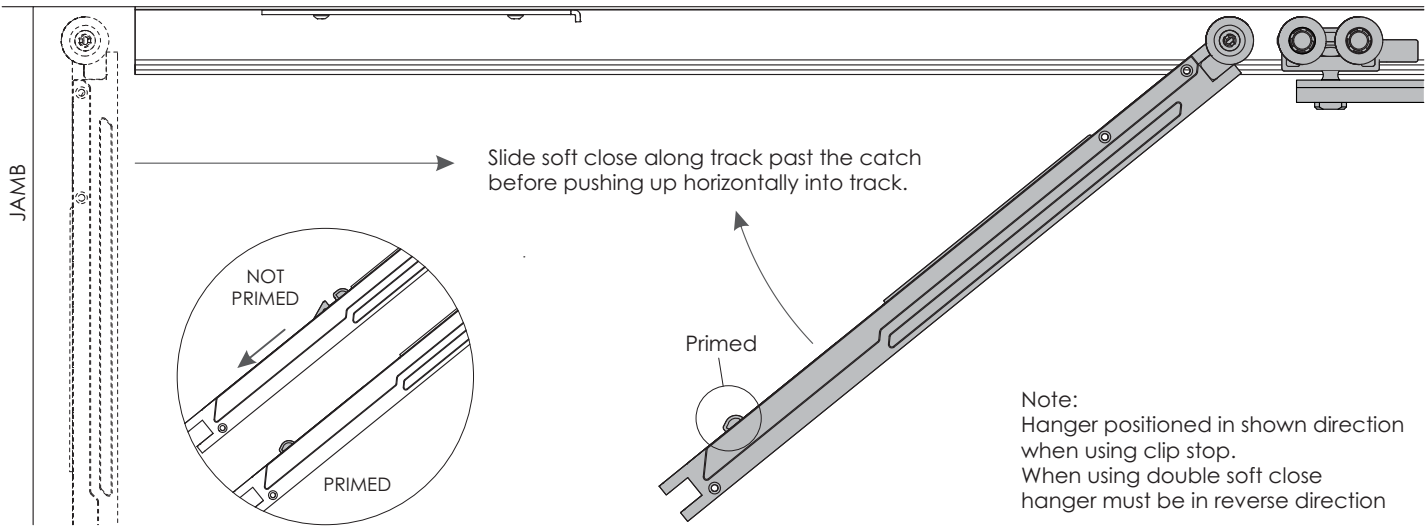

Insert 2nd hanger & attach to soft close with cap screw. Install panel as per system instructions.

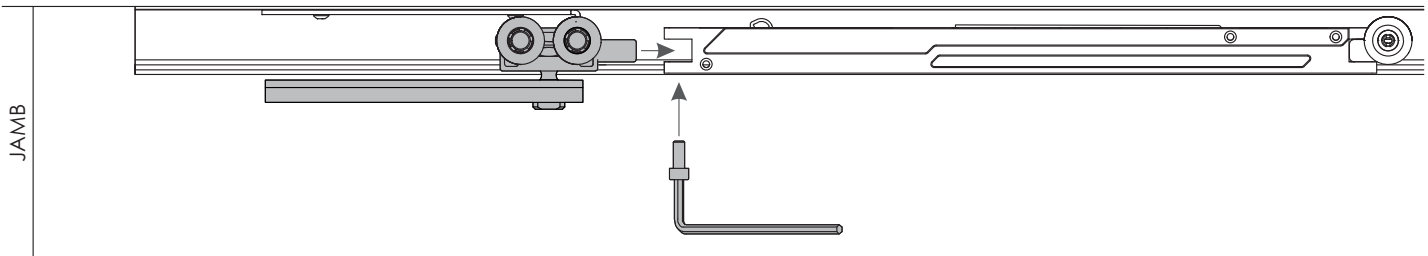

Close panel to jamb to determine catch plate adjustment requirements

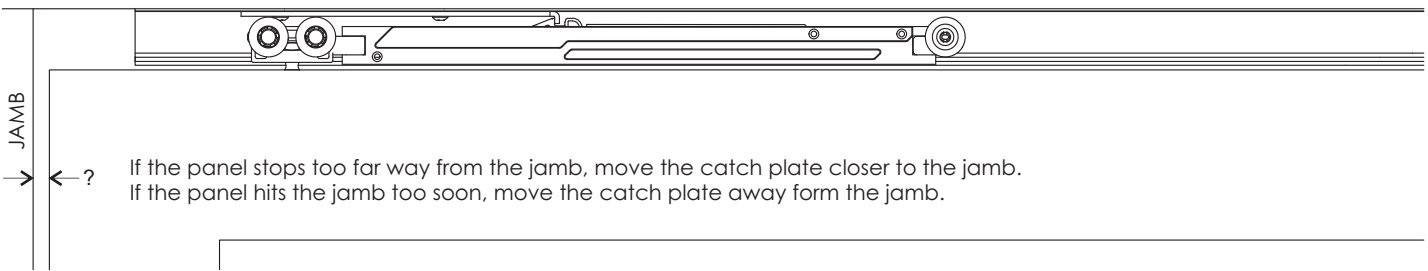

Adjust catch plate as required. Secure in final position with the 3rd screw

