




P509-150

MARK CENTER OF DOOR THICKNESS

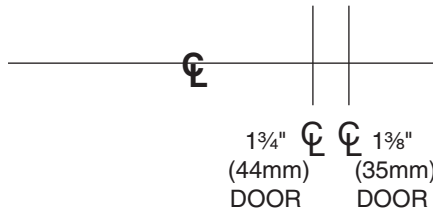

FOR 7/8" (22MM)
OR 1" (25MM) HOLE
DEPENDING ON
LATCH HOUSING

FOLD HERE ON EDGE OF DOOR




TEMPLATE FOR INSTALLING LOCKS

Customer Service
Servicio al cliente
Service à la clientèle

1-877-671-7011
www.allegion.com/us

MARK CENTER
FOR 2 1/8" (54MM) HOLE

2 3/4" (70MM) BACKSET

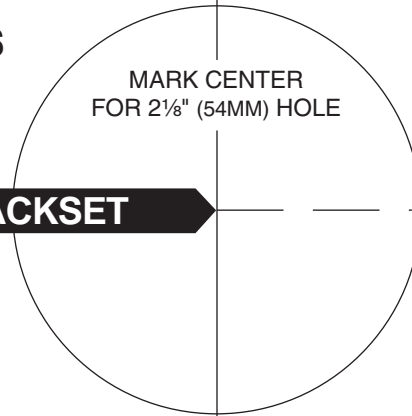

IMPORTANT
PLACE TEMPLATE ON HIGH EDGE
OF BEVELED (SLANTED) DOOR



ALLEGION

© 2014 Allegion
Printed in U.S.A.
P509-150 Rev. 01/14-C

MARQUE EL
CENTRO DEL GROSOR
DE LA PUERTA

MARQUER LE
CENTRE SUR L'ÉPAISSEUR
DE LA PORTE

44mm 35mm



PUERTA DE 44mm (1 3/4")
PUERTA DE 35mm (1 3/8")

PORTE DE 44 MM (1 3/4 PO)
OU DE 35 MM (1 3/8 PO)

PARA UN AGUJERO
DE 22mm (7/8") O
25mm (1")
DEPENDIENDO
DE LA CAJA DEL
PESTILLO

POUR UN TROU
DE 22 MM (7/8 PO)
OU DE 25 MM
(1 PO) SELON LE
LOGEMENT DE
LA SERRURE

PLIER ICI SUR LE
REBORD DE LA PORTE

**DISTANCIA DE LA BOCALLAVE DE 70mm (2 3/4")
ÉCARTEMENT DE 70 MM (2 3/4 PO)**

DOBLAR AQUI SOBRE
EL BORDE DE LA PUERTA

PLANTILLA PARA INSTALAR CERRADURAS

MARQUE EL CENTRO
PARA UN AGUJERO
DE 54mm (2 1/8")

IMPORTANTE
COLOQUE LA PLANTILLA
SOBRE EL BORDE ALTO DE LA
PUERTA BISELADA (INCLINADA)

GABARIT POUR INSTALLER UNE SERRURE

MARQUER LE CENTRE
POUR UN TROU
DE 54 MM (2 1/8 PO)

IMPORTANT
PLACER LE GABARIT
SUR LE REBORD SUPÉRIEUR
D'UNE PORTE BISEAUTÉE