

VON DUPRIN®

6200 Series

Electrical strikes



Von Duprin is the leading manufacturer of premium, heavy-duty electric strikes which are known for their reliability, durability and security. Electric strikes provide remote release of a locked door, allowing the door to be opened without retracting the latchbolt. Remote access enabled through the release of an electric strike lip (sometimes called a keeper or a gate). When the door closes, the bevelled latchbolt rides over the lip and falls into the electric strike pocket.

The Von Duprin 6200 Series strikes are designed to withstand a very heavy workload. Their high quality stainless steel construction is very hard-wearing and designed for use with a variety of mortice or cylindrical locksets.

Features

- Developed with Von Duprin's high standards and engineering expertise
- Non-handed
- 12 VDC or 24 VDC
- Fall secure (FSE) or fall safe (FS) select ability
- Adjustable strike box for compensation of any door or frame misalignment
- Heavy-duty stainless steel construction
- Tested over 1,000,000 cycles
- 455kg to 680kg holding strength
- 32kg impact strength
- Tamper resistance design

Warranties	
Mechanical	5 years
Finish	allegion.co.nz/finisheswarranty
Electronic	1 year

Specification guide

Code prefix

VDE

Model

6211 DS FS metal frame 12v	11851
6211 DS FS metal frame 24v	11853
6211 DS FSE metal frame 12v	11852
6211 DS FSE metal frame 24v	11854
6211WF DS FS 24v	11849
6211WF DS FSE 12v	11848
6211WF DS FSE 24v	11850
6211AL DS FSE 24v	10112

- Code prefix
All codes are prefixed with VDE
- Model
Select the desired model e.g., 6211WF DS FS 24v VDE11849

Finish




ALUM

Aluminium


- 6211 - Electric strike for use on new installations with mortice locks (without deadbolt or cylindrical locks) on single door, hollow metal frame applications
- 6211WF - Electric strike for use on new installations with mortice locks (without deadbolt or cylindrical locks) on single door, wood frame applications
- 6211AL - Electric strike for use on new installations with mortice locks (without deadbolt or cylindrical locks) on single door, aluminium frame applications
- DS - Dual monitor switches
- FS - Fail safe
- E - Entry buzzer

6200 Series electric strikes

Specifications	12V	24V
Resistance in Ohms \pm 10% @ 21°C	21	128
Watt-seated @21°C	7.5	8
Amps-seated @21°C	.6	.33
Amps-inrush @21°C	.6	33

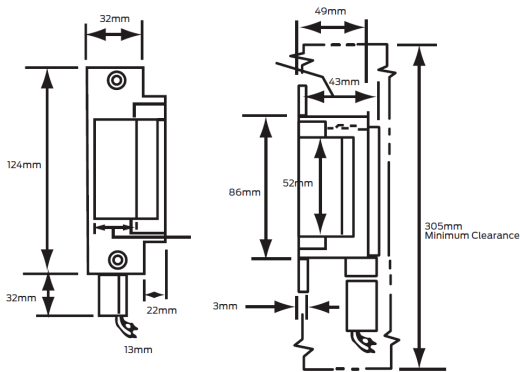

6211

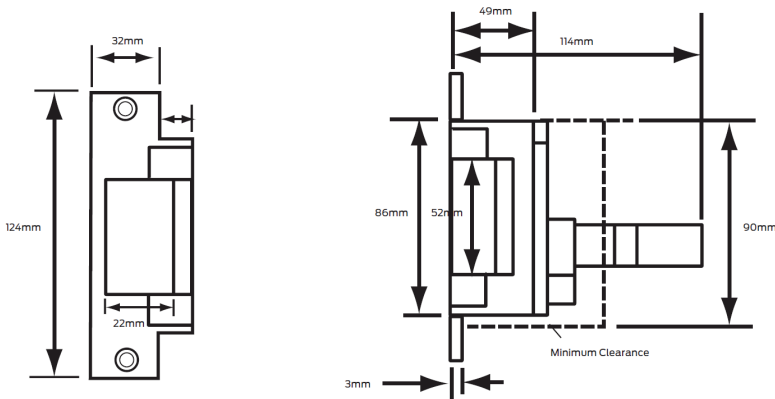

6211WF