

G2 Series Locks and latches



Legge has long been associated with providing Australasia industry-leading safety, security, style and convenience and the G2 cylindrical lockset is no exception. The G2 lockset offers ANSI/BHMA Grade 2 certification and the Sparta lever, with it's 35mm to 45mm clearance, makes it suitable for both residential and light commercial applications requiring compliance with AS1428:1-2009 design for access and mobility code, G2 Series functions include entrance, passage, privacy, patio and dummy trim. Commercial functions such as classroom, storeroom and Vanguard options are also available for added security and safety.

Features

- Sparta lever is compliant with AS1428:1-2009
- Tested in excess of 400,000 operating cycles
- Key removable outside lever for quick and easy cylinder replacement
- Snap-on inside rose conceals mounting plate and screws
- Supplied standard with D and T strikes and spacer rings
- Two nickel silver keys per lock supplied with Schlage C4 6 pin keyway as standard
- The G2 series is ideally suited for residential, light and medium duty commercial applications
- Non-handed

	Warranties		
Mechanical	10 years		
Finish	allegion.co.nz/finisheswarranty		



Specification guide

Series	Lever	Function	Finish
G2G2	OrbitO SpartaS	G10S PassagePASG40S PrivacyPRIG50PD EntranceENTG66PD Double cylinder LockDCENTG70PD ClassroomCLAG80PD Store roomSTRG170 Dummy trimDUMG91PD Vanguard entranceVENT	Satin chrome plate SCP

Note: Orbit knob only available in G50PD and G80PD Functions

1. Series

	Select the desired series e.g. G2
2.	Lever Select the required lever e.g. Sparta
3.	Function Select the required function e.g. G50PD Entrance
4.	Finish Select the desired finish e.g. Satin chrome plate

Specifications

Timber or metal	
35mm to 50mm	
50mm to 60mm available	
Steel, zinc dichromate plated	
Pressure cast zinc	
Wrought brass	
Stainless steel	
Stainless steel	
Stainless steel 45mm standard 22mm optional	
70mm standard, 60mm and 127mm backset latches available	
Schlage C6 pin keyway and C4 6 pin keyway standard, Schlage E6 pin keyway is optional	

Finish




SCP


Satin Chrome Plate

Dimensions

Orbit



Sparta



Testing and Compliance



Accessibility: Compliant to the AS 1428:1-2009 Design for Access and Mobility

Caution: When door closers are installed and adjusted to meet reduced opening force requirements, there may be insufficient power to reliably close and latch the door, depending on prevailing operating conditions.



Note: In areas of high wind pressure and/or air conditioning pressures, the LCN Automatic Door Operators are recommended.

Legge G2 Series non-keyed

Functions

G105 - Passage latch Both levers always unlocked	
G30D - Patio lock Push-button locking. Turning inside lever or closing door releases button, preventing lock-out	
G40S - Bath/bedroom privacy lock Push-button locking locks outside lever. Turning inside lever releases button. Outside lever has emergency release	
G170 - Single dummy trim Dummy trim for one side of door. Used for door pull or as matching inactive trim	Ĺ
Legge G2 Series keyed	Outside Inside
G50PD - Entrance lock Turn/push-button locking, pushing and turning button locks outside lever requiring use of key until button is manually unlocked Push-button locking: pushing button locks outside lever until unlocked by key or by turning inside lever	
G66PD - Double cylinder entrance lock Key outside locks/unlocks both handles simultaneously. Key inside locks/unlocks both handles simultaneously	

G70PD - Classroom lock

Outside lever locked and unlocked by key. Inside lever always unlocked

G80PD - Storeroom lock


Outside lever fixed. Entrance by key only. Inside lever always unlocked




Legge G2 Series Vanguard option

G2 Series keyed lever locks with Vanguard provide vandal resistant technology. Designed for maximum accessibility, security, durability and function, Vanguard sets the standard for door hardware in educational facilities and other applications subject to heavy traffic or abuse. The unique features of Vanguard prevent damage to internal lock components caused by excessive force from individuals kicking, hitting or standing on the lever to gain access. In addition, total facility integration is available with the design and keying compatibility of heavy duty G2 Series lever furniture with Vanguard and standard G2 Series lever functions.

Levers are replacing knobs in the marketplace. The benefit of added grip and leverage that levers provide to those with limited mobility has, however created the opportunity for increased abuse or vandalism. This abuse often renders the lock in-operable, and in some cases, violates the security of the door. While this abuse is commonly associated with schools, it can and does occur in universities, office buildings, commercial and public buildings.



Locked lever freely rotates up and down while remaining securely locked. The Vanguard function also increases resistance to over-rotation of the lever.

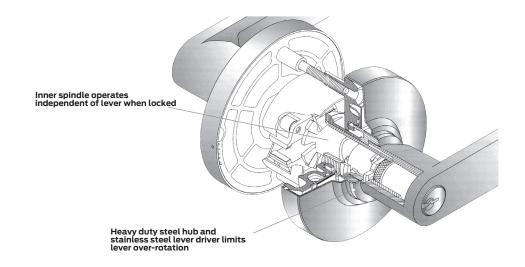

Function

G91PD - Entrance/office lock

Push-button locking. Pushing button locks (disengages) outside lever until unlocked with key or by turning inside lever. Inside lever always unlocked. Vanguard is designed to disengage outside spindle from latch

Inside lever always unlocked. Vanguard is designed to disengage outside spindle from latci with in locked condition



Outside Inside






Legge G2 Series accessories


Springlatch

Backset: 60mm, 70mm and 127mm Finish: Satin chrome plate




D strike

Finish: Satin stainless steel




Deadlatch

Backset: 60mm, 70mm and 127mm Finish: Satin chrome plate




T strike

Finish: Satin stainless steel



Rebate kit

This kit adapts latches and strikes for 13mm rebated door and frame preparations



Packing ring

Finish: Satin stainless steel



© Allegion 2021. All rights reserved. Material and design specifications subject to change without notice. Product colour reproduction is as near to actual product colour as production methods allow. Warning: Products in this brochure are the subject of registered designs and patents. This brochure relates to Australian and New Zealand products only and some product, design or specifications may differ in other countries.

